
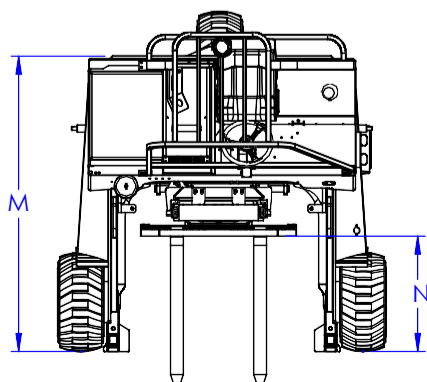
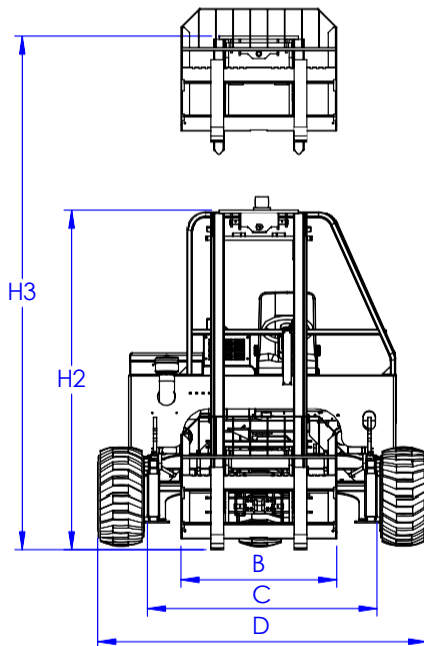


# NAVIGATOR RT-7000 G2

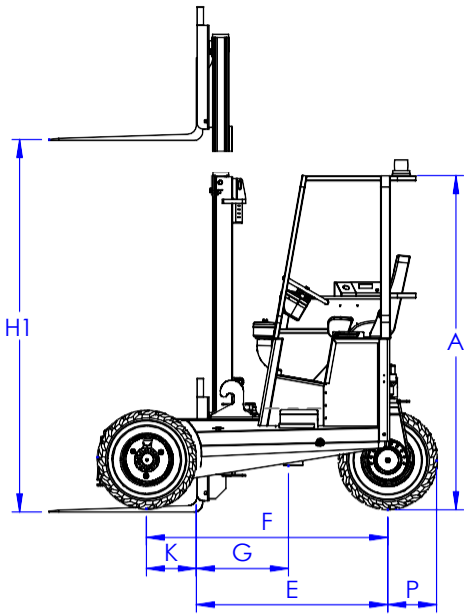

|    | MODEL                                | RT-7000 G2                     |
|----|--------------------------------------|--------------------------------|
|    | TYPE                                 | Standard/Nav Reach             |
| 1  | CAPACITY @ 24" LOAD CENTER           | 7,000 LBS                      |
| 2  | DIESEL ENGINE                        | 59 HP Kubota                   |
| 3  | ENGINE EMISSION COMPLIANCE           | EPA TIER4 FINAL                |
| 4  | MAXIMUM RPM                          | 2700 RPM                       |
| 5  | ELCECTRICAL SYSTEM                   | 12 VOLT                        |
| 6  | DRIVE WHEELS                         | 3                              |
| 7  | STEERING                             | HYDRAULIC                      |
| 8  | TIRE TYPE                            | 31X13-16.5<br>31X15.5-15 8-PLY |
| 9  | TIRE OUTSIDE DIAMETER (FRONT/REAR)   | 31.5"/31"                      |
| 10 | TIRE WIDTH (FRONT/REAR)              | 13"X15.5"                      |
| 11 | MAXIMUM SPEED                        | 8 MPH                          |
| 12 | MAXIMUM GRADABILITY (4-WAY MODE)     | 30%                            |
| 13 | TURNING RADIUS                       | 99"/105"                       |
| 14 | UNLADEN WEIGHT (approximate)         | 7,040 LBS/7,985 LBS            |
| 15 | WORKING PRESSURE (ATTACHMENTS)       | 3100 PSI                       |
| 16 | TILT OF MAST (FORWARD/BACKWARD)      | 10°/10°                        |
| 17 | SIDESHIFT DISTANCE                   | 5"                             |
| 18 | STANDARD FORK                        | 2"x5"x48"                      |
| 19 | MAST CARRIAGE TRAVEL                 | 23"/29"                        |
| A  | HEIGHT TO TOP OF CANOPY              | 103-1/2"                       |
| B  | FORK CARRIAGE WIDTH (CLASS)          | 48"                            |
| C  | FRAME OPENING                        | 65-1/4"                        |
| D  | OVERALL FRAME WIDTH                  | 101-1/2"                       |
| E  | OVERHANG (NAV-REACH)                 | 69"/75"                        |
| F  | WHEELBASE                            | 69"/75"                        |
| G  | CENTER OF GRAVITY (FROM FORK FACE)   | 24"/30"                        |
| H1 | LIFT HEIGHT                          | 143-1/2"                       |
| H2 | MAST HEIGHT - COLLAPSED              | 105"                           |
| H3 | MAST HEIGHT - RAISED                 | 183"                           |
| J  | GROUND CLEARANCE                     | 16"                            |
| K  | FACE OF FORK TO CENTER OF FRONT TIRE | 14"                            |
| L  | ANSI STANDARD                        | B56.14                         |
| M  | OVERALL LENGTH                       | 99"/105"                       |
| N  | FRONT FACE OF TIRE TO FACE OF FORK   | 29"                            |

The above specifications are not binding upon the manufacturer and may be changed without prior notice.  
Weights may vary, depending on tire and/or fork options.

For more information, contact your local Navigator dealer.

**Navigator Truck Mounted Forklifts**  
**7399 Beatline Road**  
**Long Beach, MS 39560 USA**  
**tel 1.228.864.6293**  
**www.NavigatorForklift.com**

